

Formerly known as



„NEW” -
REVISED
TECHNOLOGY

Event - Film - TV - Industry

Superspot 250 W

Daylight for event - film - TV - industry

System characteristics

- Extremely robust
- Efficient cooling
- Parabolic reflector
- 4 diffusers

Advantages

- Portable for mobile use
- For continuous operation
- High light yield
- Variable light distribution

Superspot 250 W

black

Art.-Nr.: 68H4510

aluminium white

Art.-Nr.: 68H4500

Technical details:

- Robust, 3-part cast-aluminium housing with thermally decoupled, hot-start ignition device and GY 9,5 socket
- High-precision parabolic reflector for high light yield
- Patented reflector cooling
- Compact, with low temperatures at socket
- Easy to focus with spindle, spindle nut and toothed belt for precision
- Bulb is changed from the back in a no-tools, quick and easy operation
- Two-pole safety cut-off when the back of the light is opened
- Choice of 4 diffusers for variable light distribution
- Bulb: MSD 250 W/SE
- Black or aluminium-white powder-coat finish, high-temperature resistant
- Sizes 300 x 170 mm, lens diameter 145 mm
- Weight approx. 2.8 kg

Accessories:

01. Four-way barndoor
02. Diffuser, narrow spot (No. 1/blue)
03. Diffuser, medium flood (No. 2/black)
04. Diffuser, wide flood (No. 3/white)
05. Diffuser, very wide flood (No. 4/red)
06. Safety rope 3 mm
07. Safety rope 2 mm
08. C-Clamp with pivot 16 mm
09. Extension cable, 2.5 m
10. Extension cable, 5.0 m
11. Extension cable, 10.0 m
12. Multicore cable, 5.0 m
13. Multicore cable, 10.0 m
14. Multicore cable, 20.0 m
15. Bulb, MSD 250 W/SE
16. Split box 6x Amphenol
17. Split cable 6x Amphenol

black / aluminium white

Art.-No.: 68H4514 / 4504

Art.-No.: 68H4540 / 4520

Art.-No.: 68H4542 / 4522

Art.-No.: 68H4546 / 4526

Art.-No.: 68H4548 / 4528

Art.-No.: 92M0500

Art.-No.: 92M0515

Art.-No.: 91M0850

Art.-No.: 51C0703

Art.-No.: 51C0702

Art.-No.: 51C0694

Art.-No.: 51C0704

Art.-No.: 51C0706

Art.-No.: 51C0708

Art.-Nr.: 72H0324

Art.-No.: 51C0700

Art.-No.: 51C0705

Split box:

- Robust plastic housing
- Black with silkscreen printing
- Input Schaltbau M 3, 12+E, output 6x Amphenol
- Size 185 x 105 x 50 mm

Art.-No.: 51C0700



Split cable:

- Cable length 0.5 m
- Input Schaltbau M 3, 12+E, output 6x Amphenol

Art.-No.: 51C0705



Ballasts:

The electronic ballasts have active power factor control (PFC) and are compliant with EN 61000-3-2. Compact and lightweight, they are suitable for mobile use. Output power remains constant irrespective of input voltage and is dimmable down to 50 %. The 140 Hz square-wave current waveform ensures flicker-free lighting.

The Event- and Studio-line ballasts are available as single ballasts or as 19" rack configurations with up to six ballasts.

All are dimmable to 50 %.

All three versions are available with DMX control for switching and dimming.

Event- / Studio-line ballasts:


The Event-line ballast in its sturdy aluminium housing can be set upright or flat.

Active fan cooling prevents overheating and switch-off even when ambient temperatures are high. The Studio-line units must always be operated in the upright position. The line power input can be locked to prevent inadvertent disconnection from the power source.

Event-line ballast 250 W without DMX control:

- Input voltage 90 – 260 V / 50 Hz
- Current consumption 1.3 A
- Power factor 0.99
- Output 250 W
- Dimensions 320 x 155 x 85 mm
- Weight approx. 2.5 kg

Art.-No.: 61E0698



Studio-line ballast 250 W without DMX control:

- Input voltage 90 – 260 V / 50 Hz
- Current consumption 1.3 A
- Power factor 0.99
- Output 250 W
- Dimensions 250 x 185 x 150 mm
- Weight approx. 3.2 kg

Art.-No.: 68E1220



19" rack inserts:

The insert houses 6 ballasts. Each two ballasts receive one phase input, the light outputs are grouped into a Schaltbau M 3 socket.

The CEE 16 A 5-pole line IN socket is located at the back of the insert.

19" insert 250 W without DMX control:

- Input voltage 90 – 260 V, 3-phase 50 Hz
- Current consumption 2,6 A per phase
- Power factor 0,99
- Output 6x 250 W
- Dimensions 19", 4U
- Weight 20 kg

Art.-Nr.: 61E0741



19" cassette inserts 6x 250 W:

- CKE 250, 19" Casing for Cassette slide-in module 4U
- CK 250-1, Cassette slide-in module CK 400, max. 6 pieces
- CKD-1, DMX-Controlboard slide-in module, max. 1 piece
- CKB-3, Cover-plate for empty slots



Art.-Nr.: 51C0276

Art.-Nr.: 51C0270

Art.-Nr.: 51C0258

Art.-Nr.: 51C0470

Power insert 4 outputs Power insert 7 outputs

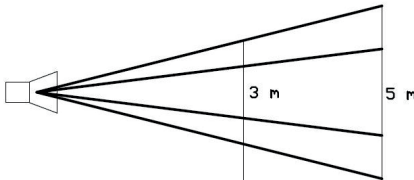

- 4 or 7 3-phase, fuse-protected outputs
- Multifunktion display for all 3 phases
- RCD 63 A / 30 mA
- Main fuse 63 A, 3-phase
- Connecting cable 1.5 m with CEE-plug, 63 A
- 19" insert, 4U
- Weight 18 kg

Art.-No.: 61E0783

Art.-No.: 61E0784



Photometric Data

Superspot 250 W		Streuscheiben / Diffusor	
			
Linse Narrow Spot Nr. 1	47.000 lux	17.000 lux	7°
Linse Medium Flood Nr. 2	14.960 lux	5.400 lux	10x24°
Linse Wide Flood Nr. 3	6.100 lux	2.200 lux	18x42°
Linse Very Wide Flood Nr. 4	2.690 lux	970 lux	40°



Dr. Höhle AG UV Technology, Lochhamer Schlag 1, 82166 Gräfelfing/München, Germany
Phone: +49 89 85608-0, Fax: +49 89 85608-148. www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information.
We reserve the right to modify technical data. © Copyright Dr. Höhle AG. Updated 05/16.